

Coil Specification (at 20 °C)

Coil Sensitivity	Nominal Voltage (VDC)	Nominal Current (mA)	Coil Resistance ($\Omega \pm 8\%$)	Power Consumption (W)	Pull-In Voltage (VDC)	Drop-Out Voltage (VDC)	Maximum Allowable Voltage (VDC)
BJH-L BJH-LM	3	66.7	45	Abt. 0.2	75% Maximum	10% Minimum	130%
	5	40	125				
	6	33.3	180				
	9	22.2	405				
	12	16.7	720				
BJH-D BJH-DM	24	8.3	2880	Abt. 0.4			
	3	150	22.5				
	5	89.2	62.5				
	6	75	90				
	9	50	202.5				
	12	37.5	360				
	24	18.8	1440				

Ordering Information

BJH - SS - 1 12 D M

Contact Form: Nil:One form C

Coil Type: D:Standard DC Coil
L:High Sensitivity DC Coil

Coil Voltage: 03:3V, 05:5V, 06:6V, 09:9V
12:12V, 24:24V, 48:48V

Number of Pole: 1:One Pole


Type of Sealing: SS:Half a seal

Type: BJH

Classification

Model	BJH					
	Standard DC Coil			High Sensitivity DC Coil		
Coil Sensitivity	1A	1B	1C	1A	1B	1C
Flow Solder Type	BJH-SS-1□□DM	BJ-SS-1□□DB	BJ-SS-1□□D	BJH-SS-1□□LM	BJ-SS-1□□LB	BJ-SS-1□□L

Dimension

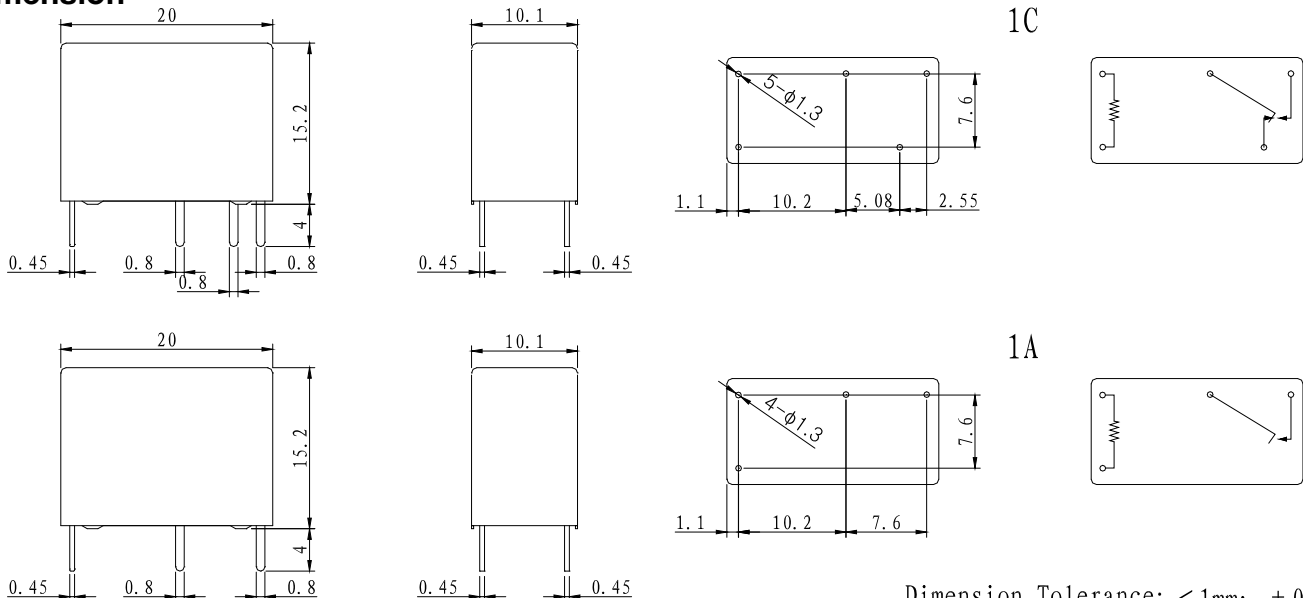

Dimension Tolerance: < 1mm: ± 0.2 mm
1--5mm: ± 0.3 mm
> 5mm: ± 0.5 mm