




Magnetic Maintenance Relay Sseries 磁保持继电器系列--JY09F

FEATURES特点

- Small size, 120A contact switching capability
120A
- Small coil power consumption ,largely reduce the temperature increment
线圈功耗小，温升极低
- Small contact resistance, good electrical contact stability
接触电阻小，电接触稳定性好；
- Strong shock resistance and vibration resistance
抗冲击、抗振动能力强；
- Overall dimensions(76.0X43.0X25.0)mm
76.0×43.0×25.0mm

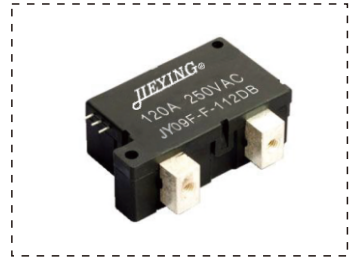

CONTACT DATA 主要技术参数

Contact Form 触点形式	1A 1B
Contact Material 触点材料	AgSO ₂
Contact Resistance 接触电阻	1.0mΩ
6VDC 1A	
Rated Load 触点负载	120A 250VAC
Max.Switching Current 最大切换电流	120A
Max.Switching Voltage 最大切换电压	250VAC
Max.Switching Power 最大切换功率	30000VA
The durability of electricity 机械寿命	5×10 ⁵
Mechanical durability 电气寿命	6×10 ³
Pick-up Time 动作时间	≤30ms
Release Time 回复时间	≤30ms
Coil Power 线圈功率	Single coil: 1.8W Double coil: 3.6W 单线圈: 1.8W 双线圈: 3.6W
Insulation (Coil & Contacts) 触点与线圈耐压	4000VAC 1min
Insulation (Between Contacts) 触点间耐压	1800VAC 1min
Insulation Resistance 绝缘电阻	≥1000mΩ
Ambient Temperature 环境温度	-40° C~+70° C
Shock Strength 抗冲击强度	1000m/S ²
Shock Stability 抗冲击稳定性	100M/S ²
humidity 湿度	98%RH.40
Installation mode 安装方式	Momentary Connection 快速连接
weight 重量	180g

SAMPLE ORDER 订货示例

<u>JY09F</u> — <u>F</u> — <u>1</u> <u>12</u> <u>D</u> <u>B</u>					
1 2 3 4 5 6					
Relay Type: JY09F	JY09F				
Sealed type: F- dustproof type, S- plastic encapsulated type	密封型: F-防尘型, S-塑封型				
Contact group number: 1 represents 1 groups of contacts, 2 represents 2 sets of contacts	触点组数: 1代表1组触点, 2代表2组触点				
Coil Voltage: 09-9VDC, 12-12VDC	线圈电压: 09代表9VDC, 12代表13VDC				
Coil form: no indication of a group of coils, D represents two sets of coils	线圈形式: 无表示一组线圈, D表示两组线圈				
Contact form: M stands for normally open contact, does not represent conversion, B stands for normally closed	触点形式: M代表常开触点, 没有代表转换, B代表常闭				

Coil Data (at 23°C) 线圈参数 (at 23 °C)

Model 型号规格	Rated Voltage VDC 额定电压 VDC	Coil Resistance $\Omega \pm 10\%$ 线圈电阻 ($\Omega \pm 10\%$)	Max.Pull-in Voltage $\leq VDC$ 吸合电压最大 VDC	Min.Release Voltage $\geq VDC$ 释放电压最小 VDC	Coil Power 线圈功率W
9V	9	45	6.75	6.75	1.8
12V	12	80	9	9	
24V	24	320	18	18	
48V	48	1280	36	36	
9V	9	2×22.5	6.75	6.75	3.6
12V	12	2×40	9	9	
24V	24	2×160	18	18	
48V	48	2×640	36	36	

Overalland Mounting Dimensions 外形及安装图

