


小型大功率继电器

Miniature High Power Relay

8A

特性 / FEATURES


- 8A触点切换能力
8A switching capability
- 线圈与触点间介质耐压5kV
5kV dielectric strength (between coil and contacts)
- 爬电距离为10mm
Creepage distance: 10mm
- 满足VDE0700/0631加强绝缘要求
Meeting VDE 0700, 0631 reinforce insulation
- 可提供符合IEC60335-1标准产品
Product in accordance to IEC 60335-1 available
- 低高度
Low height



RoHS
Compliant

订购信息 / ORDERING INFORMATION

SML-12VDC-S L-2C

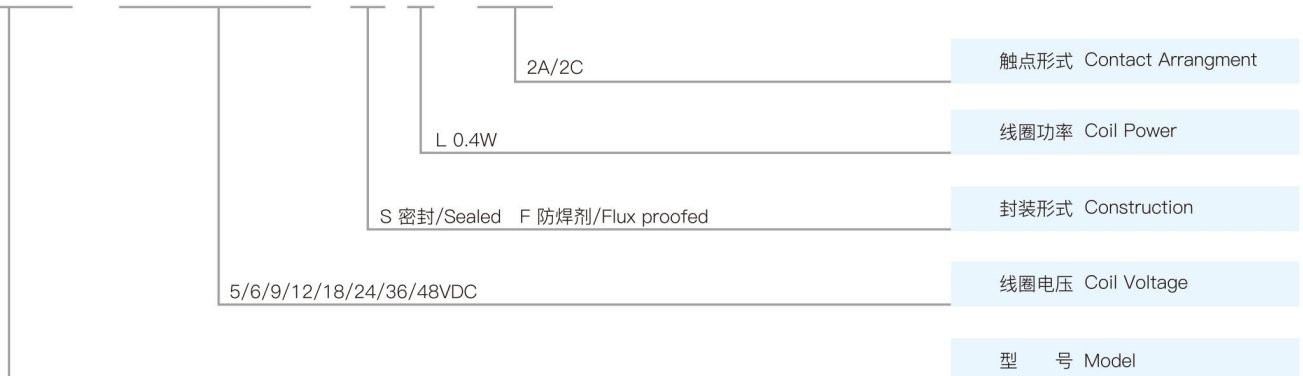

触点参数 / CONTACT PARAMETERS

触点形式	Contact arrangement	2A, 2C
接触电阻	Contact resistance	≤100mΩ (1A 6VDC)
触点材质	Contact material	银合金/Silver alloy: AgSnO ₂ In ₂ O ₃ , AgSnO ₂ , AgNi
触点负载(阻性)	Contact rating(Res. load)	8A 250VAC/30VDC
最大切换电压	Max switching voltage	440VAC/125VDC
最大切换电流	Max switching current	8A
最大切换功率	Max switching power	2000VA
电耐久性 (频率:每小时360次)	Electrical endurance (Frequency:360 ops/h)	1×10 ⁵ ops / 1×10 ⁴ ops
机械耐久性 (频率:每小时18000次)	Mechanical endurance (Frequency:18000 ops/h)	1×10 ⁷ ops

SML-2P^(15FD) Series

小型大功率继电器 Miniature High Power Relay

8A

特性参数 / CHARACTERISTICS PARAMETERS

绝缘等级	Insulation level	B/F	
绝缘电阻	Insulation resistance	1000MΩ(500VDC)	
介质耐压 (漏电流 1mA)	Dielectric strength (Leakage current 1mA)	线圈与触点间 Between coil and contacts	5000VAC 1min
		触点组间 Between contacts sets	2500VAC 1min
		断开触点间 Between open contacts	1000VAC 1min
吸合时间(额定电压下)	Operate time(at nominal voltage)	≤15ms	
释放时间(额定电压下)	Release time (without diode) (at nominal voltage)	≤8ms	
湿度	Humidity	5% ~ 85% RH	
环境温度(°C)	Ambient temperature	-40°C ~ +85°C	
抗冲击	Shock resistance	稳定性/Functional	98m/s ²
		强度/Destructive	980m/s ²
抗振动	Vibration resistance	10Hz~150Hz 10g/5g	
重量	Weight	约/Approx 13g	
封装形式	Construction	密封/Sealed 防焊剂/Flux proofed	

备注: 以上数据均为初始值

Remark: All above data is initial value

线圈参数 / COIL PARAMETERS

常温/At (23°C)

功耗(W)	Power consumption(W)	0.4W(L)							
额定电压(VDC)	Nominal voltage(VDC)	05	06	09	12	18	24	36	48
线圈电阻(Ω±10%)	Coil resistance(Ω±10%)	62	90	202	360	810	1440	3240	5760
吸合电压(Max)	Pick-up voltage(Max)	70% 额定电压(Nominal voltage)							
释放电压(Min)	Drop-out voltage(Min)	10% 额定电压(Nominal voltage)							
允许最大电压(VDC)	Max allowable overdrive voltage(VDC)	150% 额定电压(Nominal voltage)							

安全认证(相关认证以第三方认证证书为准) / SAFETY APPROVAL RATINGS





小型大功率继电器

Miniature High Power Relay

8A

外形图 / OUTLINE DIMENSIONS


单位/Unit(mm)

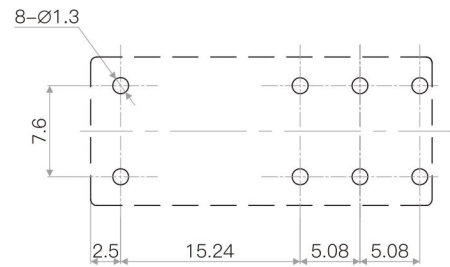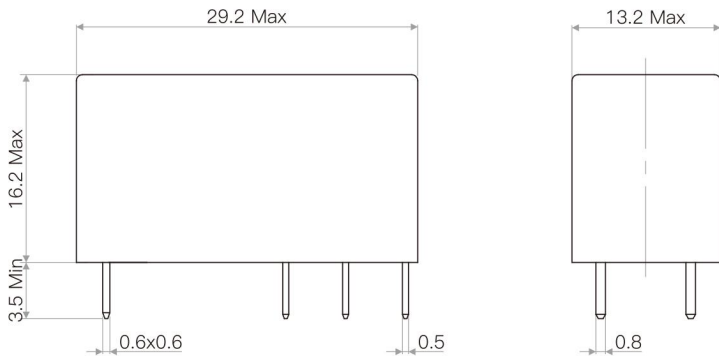

安装孔图(底视图)/Installation hole drawing(Bottom view)

未注公差/Tolerance:±0.1

线路图(底视图) / WIRING DIAGRAM (BOTTOM VIEW)




转换2C型/Conversion 2C type




常开2A型/Normally open 2A type

性能曲线图 / CHARACTERISTIC CURVES


电耐久性曲线
Electrical endurance curve

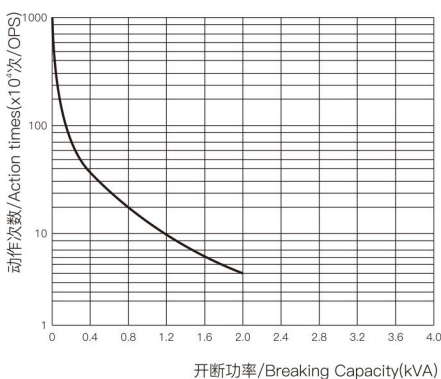

最大切换功率
Maximum switching power

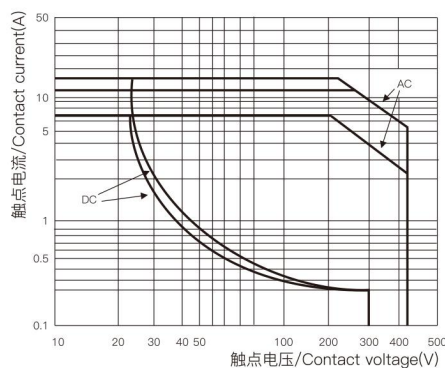

线圈温升(DC)
Coil temperature rise

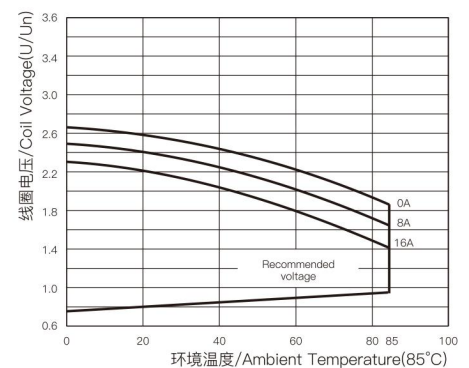

测试条件: NO端, 阻性负载, 250VAC, 防焊剂型, 室温, 1s通9s断。

Test conditions: NO, Resistive load, 250VAC, Flux proofed, Room temp., 1s on 9s off.