

SPST MINIATURE POWER RELAY

FEATURES

- 4 kV dielectric strength
- Proof tracking index (PTI/CTI) 250
- 5 Amp switching capability (version "T" 10 Amp)
- Epoxy sealed version available
- Class F insulation available
- UL, CUR file E365652
- TUV B0887930007
- CQC 14002105344



CONTACTS

Arrangement	SPST-NO. (1 Form A)
Ratings (max.)	(resistive load) 150W or 1250 VA (Version "T": 300W or 2500VA)
switched power	5 A (Version "T" : 10A)
switched current	5 A (Version "T" : 10A)
continuous current	30VDC* or 250VAC
switched voltage	
Rated Loads UL/CUR	Standard Coil
	5A at 250VAC, resistive, 100k cycles 85°C
	5A at 30VDC, resistive, 100k cycles 85°C
	1/6HP at 125/250 VAC, 100k cycles 85°C
	Sensitive Coil
	3A at 250VAC, Res. 100k cycles 85°C
	3A at 30VDC, Res. 100k cycles 85°C
	High capacity version "T"
	Standard Coil
	10A at 250VAC, Res. 100k cycles 85°C
TÜV/CQC	10A at 30VDC, Res. 100k cycles 85°C
	1/6HP at 125/250 VAC, 100k cycles 85°C
	TV5 at 120VAC, 25k cycles 25°C Silver tin contacts only
	Sensitive Coil
	8A at 250VAC, 85°C, 100k cycles
	8A at 30VDC, Res. 100k cycles 85°C
	Standard Coil
	5A at 250VAC/ 30VDC, Res., 100k cycles 85°C
	10A at 250VAC/ 30VDC, Res., 100k cycles 85°C("T Ver.)
	Sensitive Coil
	3A at 250VAC/ 30VDC, Res. 100k cycles 85°C
	8A at 250VAC/ 30VDC, Res., 100k cycles 85°C("T Ver.)
	(All TUV ratings 105°C Class F only)

Contact material

Silver cadmium oxide,
Silver alloy (UL only),
Silver tin oxide, gold plating available
(UL/TUV only)

Contact resistance

(load contact)

Initial

≤ 100 mΩ

typical

< 3 mΩ

COIL

Nominal coil DC voltages	3,5,6, 9, 12, 18, 24
Dropout voltage	> 5% of nominal coil voltage
Coil power	(at 20 °C)
Nominal	0.45 W (standard coil) 0.2W (sensitive coil)
at pickup voltage	220mW (standard coil) 113 mW (sensitive coil)
Temperature Rise	standard 41°C (74°F) at nominal coil voltage, 85°C sensitive 22°C (40°F) at nominal coil voltage, 85°C
Max. temperature	Max. 105°C (221°F) Standard Max. 155°C (311°F) available

GENERAL DATA

Life Expectancy	(minimum operations)
mechanical	1 x 10 ⁷
electrical	see UL/CUR/TÜV/CQC ratings
Operate Time	8 ms (max.) at nominal coil voltage
Release Time	4 ms (max.) at nominal coil voltage, (without coil suppression)
Dielectric Strength	(at sea level for 1 min.)
coil to load contacts	4000 V _{RMS}
open load contacts	1000 V _{RMS}
Insulation Resistance	1000 MΩ (min.) at 20°C, 500 VDC, 50% RH
Temperature Range operating	(at nominal coil voltage) -40°C (-40°F) to 85°C (185°F) -40°C (-40°F) to 105°C (221°F) Class F only
Vibration resistance	0.062" (1.5 mm) DA at 10–55 Hz
Shock	10 g
Enclosure	P.B.T. polyester
protection category	RT II, flux proof
material group	IIIa
flammability	UL94 V-0
Terminals	Tinned copper alloy, P. C.
Soldering	
max. temperature	270 °C
max. time	5 s
Dimensions	
length	18.4 mm (0.724")
width	10.2 mm (0.401")
height	15.5 mm (0.610")
Weight	6 grams (approx.)
Compliance	UL 508, IEC 61810-1, RoHS, REACH
Packing unit in pcs	100 per plastic tray / 1000 per carton box

COIL VOLTAGE SPECIFICATIONS

STANDARD COIL

Nominal Coil VDC	Must Operate VDC	Max. Cont. VDC	Resistance Ohm ± 10%
3	2.1	3.9	20
5	3.5	6.5	55
6	4.2	7.8	80
9	6.3	11.7	180
12	8.4	15.6	320
18	12.6	23.4	720
24	16.8	31.2	1280
48	33.6	62.4	5120

SENSITIVE COIL

Nominal Coil VDC	Must Operate VDC	Max. Cont. VDC	Resistance Ohm ± 10%
3	2.25	3.9	45
5	3.75	6.5	125
6	4.5	7.8	180
9	6.75	11.7	400
12	9.0	15.6	720
18	13.5	23.4	1620
24	18.0	31.2	2800

Note: All values at 20°C (73°F), upright position, terminals downward.

ORDERING DATA

AZ7709 - 1A E -12DS E F G (XXX)


I II III IV V VI VII VIII

I. Basic Series	AZ7709 : standard contacts AZ7709T : High capacity version
II. Contact Form	1A: 1 form A
III. Contact Material	Blank: Silver cadmium oxide E: Silver tin oxide B: Silver alloy (UL only)
IV. Coil Voltage	D (standard coil) 3,5,6, 9, 12, 18,24,48VDC. DS (sensitive coil) 3,5,6,9,12,18,24VDC.
V. Construction	Blank: no epoxy seal E: epoxy seal
VI. Insulation System	Blank: standard version F: Class F 155°C Version
VII. Gold plated contacts	Blank: no gold plated contacts G: gold plated contacts. (UL/TUV only)
VIII. Special code	Additional numbers or letters, which does not Designate construction features or ratings

AZ7709

MECHANICAL DATA

Dimensions in mm. Tolerance: $\pm 0.3\text{mm}$

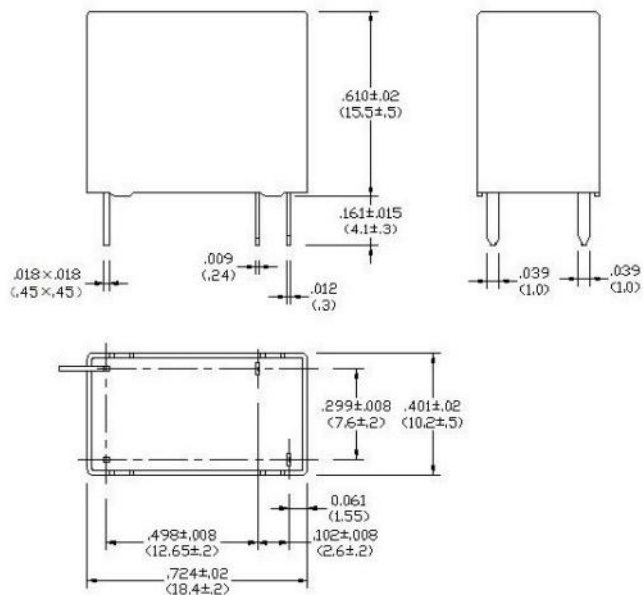

Example ordering data


AZ7709-1AE-12DF With
AZ7709 standard series
AgSnO₂ Contact Material
12 VDC standard coil
No epoxy seal
Class F Insulation System
No gold plated contacts

NOTES

1. All values at 20°C (68°F).
2. Relay may pull in with less than "Must Operate" value.
3. Provide sufficient PCB cross section as heat spreader on terminals.
4. Specifications subject to change without notice.


WIRING DIAGRAMS

Viewed towards terminals



PC BOARD LAYOUT

Viewed towards terminals. Dimensions in mm. Tolerance: $\pm 0.3\text{mm}$

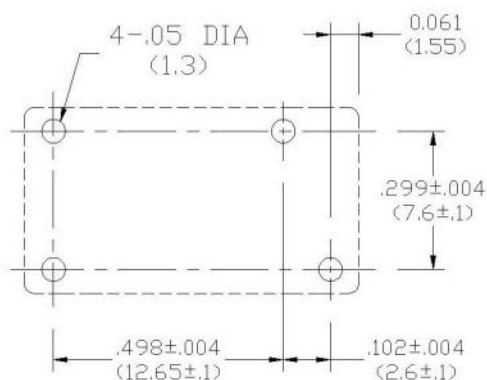

AZ7709

DISCLAIMER

This product specification is to be used in conjunction with the application notes which can be downloaded from the regional ZETTLER relay websites. The specification provides an overview of the most significant part features. Any individual applications and operating conditions are not taken into consideration. It is recommended to test the product under application conditions. Responsibility for the application remains with the customer. Proper operation and service life cannot be guaranteed if the part is operated outside the specified limits.

ZETTLER GROUP

Building on a foundation of more than a century of expertise in German precision engineering, ZETTLER Group is a world-class enterprise, engaged in the design, manufacturing, sales and distribution of electronic components. Our industry leadership is based on a unique combination of engineering competence and global scale.

For more information on other ZETTLER Group companies, please visit zettler-group.com. For support on this product or other ZETTLER relays, please visit one of the group sites below.

SITES FOR ZETTLER RELAYS

NORTH AMERICA

American Zettler, Inc.
www.azettler.com
sales@azettler.com

EUROPE

Zettler Electronics, GmbH
www.zettlerelectronics.com
office@zettlerelectronics.com

Zettler Electronics, Poland
www.zettlerelectronics.pl
office@zettlerelectronics.pl

CHINA

Zettler Group, China
www.zettlercn.com
relay@zettlercn.com

ASIA PACIFIC

Zettler Electronics (HK) Ltd.
www.zettlerhk.com
sales@zettlerhk.com



ZETTLER