



### Miniature Relay

## DS2Y RELAYS



RoHS compliant

### FEATURES

1. 2 Form C contact
2. High sensitivity-200 mW nominal operating power
3. High breakdown voltage  
1500 V FCC surge between open contacts
4. DIP-2C type matching 16 pin IC socket
5. Sealed construction

### TYPICAL APPLICATIONS

1. Telecommunication equipment
2. Office equipment
3. Computer peripherals
4. Security alarm systems
5. Medical equipment

## ORDERING INFORMATION

DS2Y-S  -

Operating function  
Nil: Single side stable

Nominal coil voltage  
DC 3, 5, 6, 9, 12, 24, 48 V

Note: UL/CSA approved type is standard.

## TYPES

Contact arrangement	Nominal coil voltage	Single side stable type
		Part No.
2 Form C	3 V DC	DS2Y-S-DC3V
	5 V DC	DS2Y-S-DC5V
	6 V DC	DS2Y-S-DC6V
	9 V DC	DS2Y-S-DC9V
	12 V DC	DS2Y-S-DC12V
	24 V DC	DS2Y-S-DC24V
	48 V DC	DS2Y-S-DC48V

Standard packing: Tube: 50 pcs.; Case: 500 pcs.

## RATING

### 1. Coil data

Single side stable type

Nominal coil voltage	Pick-up voltage (at 20°C 68°F)	Drop-out voltage (at 20°C 68°F)	Nominal operating current [±10%] (at 20°C 68°F)	Coil resistance [±10%] (at 20°C 68°F)	Nominal operating power	Max. applied voltage (at 50°C 122°F)
3 V DC	70%V or less of nominal voltage (Initial)	10%V or more of nominal voltage (Initial)	66.7 mA	45 Ω	200 mW	200%V of nominal voltage
5 V DC			40 mA	125 Ω		
6 V DC			33.3 mA	180 Ω		
9 V DC			22.2 mA	405 Ω		
12 V DC			16.7 mA	720 Ω		
24 V DC			8.3 mA	2,880 Ω		
48 V DC			6.3 mA	7,680 Ω	300 mW	

### 2. Specifications

Characteristics	Item		Specifications
Contact	Arrangement		2 Form C
	Initial contact resistance, max.		Max. 50 mΩ (By voltage drop 6 V DC 1A)
	Contact material		Ag+Au clad
Rating	Max. switching power		60 W, 62.5 VA (resistive load)
	Max. switching voltage		220 V DC, 250 V AC
	Max. switching current		2 A
	Max. carrying current		3 A
	Minimum operating power		Approx. 98 mW (147 mW: 48 V)
	Nominal operating power		Approx. 200 mW (300 mW: 48 V)
	Insulation resistance (Initial)		Min. 100MΩ (at 500V DC) Measurement at same location as "Initial breakdown voltage" section.
Electrical characteristics	Breakdown voltage (Initial)	Between open contacts	750 Vrms for 1min. (Detection current: 10mA.)
		Between contact sets	1,000 Vrms for 1min. (Detection current: 10mA.)
		Between contact and coil	1,000 Vrms for 1min. (Detection current: 10mA.)
	FCC surge breakdown voltage between contacts and coil		1,500 V
	Temperature rise (at 20°C 68°F)		Max. 65°C with nominal coil voltage across coil and at nominal switching capacity
	Operate time [Set time] (at 20°C 68°F)		Approx. 4 ms [approx. 3 ms] (Nominal coil voltage applied to the coil, excluding contact bounce time.)
	Release time [Reset time] (at 20°C 68°F)		Approx. 3 ms [approx. 3 ms] (Nominal coil voltage applied to the coil, excluding contact bounce time.) (without diode)
Mechanical characteristics	Shock resistance	Functional	Min. 490 m/s <sup>2</sup> (Half-wave pulse of sine wave: 11 ms; detection time: 10μs.)
		Destructive	Min. 980 m/s <sup>2</sup> (Half-wave pulse of sine wave: 6 ms.)
	Vibration resistance	Functional	10 to 55 Hz at double amplitude of 3.3 mm (Detection time: 10μs.)
		Destructive	10 to 55 Hz at double amplitude of 5 mm
Expected life	Mechanical		Min. 10 <sup>8</sup>
	Electrical		Min. 5×10 <sup>5</sup> (1 A 30 V DC), Min. 10 <sup>6</sup> (2 A 30 V DC)
Conditions	Conditions for operation, transport and storage*		Ambient temperature: -40°C to +70°C -40°F to +158°F Humidity: 5 to 85% R.H. (Not freezing and condensing at low temperature)
	Max. operating speed (at rated load)		60 cpm
Unit weight			Approx. 4g .14oz


Notes: \*1 This value can change due to the switching frequency, environmental conditions, and desired reliability level, therefore it is recommended to check this with the actual load. TX/TX-S/TX-D relay AgPd contact type are available for low level load switching (10V DC, 10mA max. level).

\*2 Half-wave pulse of sine wave: 11ms; detection time: 10μs

\*3 Refer to "AMBIENT ENVIRONMENT" in GENERAL APPLICATION GUIDELINES.


## REFERENCE DATA

### 1. Maximum switching capacity

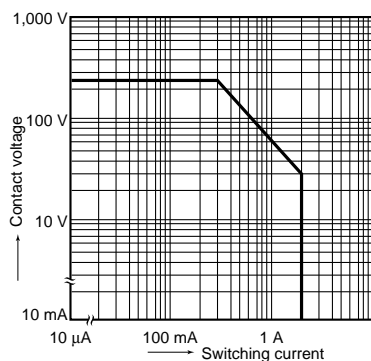


### 2. Coil temperature rise (Single side stable)

Tested sample: DS2Y-S-DC12V, 5 pcs.  
Measured portion: Inside the coil  
Ambient temperature: 21°C to 25°C 70°F to 77°F

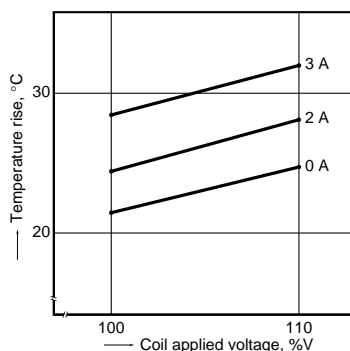

### 3. Operate/release time for single side stable (Without diode)

Tested sample: DS2Y-S-DC12V, 10 pcs.  
Ambient temperature: 20°C 68°F

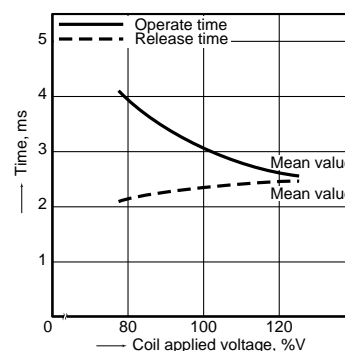


### 4-(1) Influence of adjacent mounting

Tested sample: DS2Y-S-DC12V, 10 pcs.  
Ambient temperature: 20°C 68°F

#### TEST METHOD

1. Apply nominal voltage to No. (1) and (3) DS2Y relays.
2. Measure pick-up voltage and drop-out voltage of No. (2) relay when inter-relay distance ( $\ell$ ) changes.

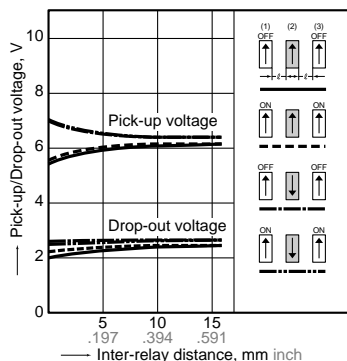


### 4-(2) Influence of adjacent mounting

Tested sample: DS2Y-S-DC12V, 10 pcs.  
Ambient temperature: 20°C 68°F

#### TEST METHOD

1. Apply nominal voltage to No. (1) and (3) DS2Y relays.
2. Measure pick-up voltage and drop-out voltage of No. (2) relay when inter-relay distance ( $\ell$ ) changes.

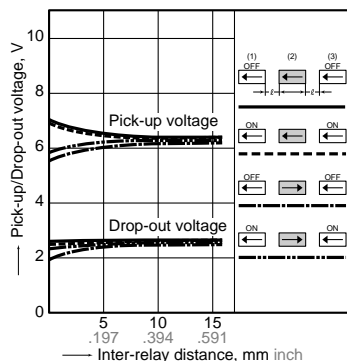


## DIMENSIONS (mm inch)

### Single side stable

#### CAD Data


#### External dimensions

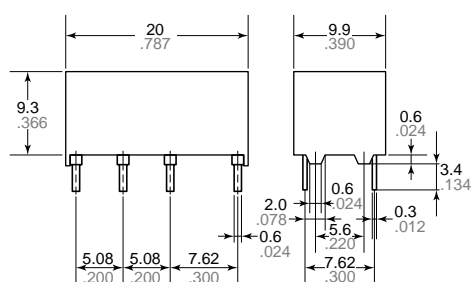

General tolerance:  $\pm 0.3 \pm 0.12$


The CAD data of the products with a **CAD Data** mark can be downloaded from: <http://industrial.panasonic.com/ac/e/>

#### PC board pattern (Copper-side view)



Tolerance:  $\pm 0.1 \pm 0.004$

#### Schematic (Bottom view) (Deenergized position)



\*A polarity bar shows the relay direction.

**For general cautions for use,  
please refer to the "Cautions for  
use of Signal Relays" or "General  
Application Guidelines".**

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Panasonic:

[DS2Y-S-DC5V](#) [DS2Y-S-DC12V](#) [DS2Y-S-DC24V](#) [DS2Y-S-DC3V](#) [DS2Y-S-DC1.5V](#) [DS2Y-S-DC6V](#) [DS2Y-S-DC9V](#)  
[DS2Y-S-DC48V](#) [DS2Y-S-DC12V-TB](#) [DS2Y-S-DC24V-TB](#) [DS2Y-S-DC48V-TB](#) [DS2Y-S-DC5V-TB](#)